


CP- VNC-V20ZR3-MD**2 MP WDR VF IR Array Vandal Dome Camera - 30Mtr.****INDIGO****Main Features**

- 1/3" 2MP PS CMOS Image Sensor
- Max 25fps@1080P
- H.264 and MJPEG Triple-stream encoding
- WDR, Day/Night(ICR), 2D/3D-DNR, AWB, AGC, BLC
- 2.8~12mm Varifocal Motorized Lens
- IR Range of 30 Mtrs, Micro SD, IP66, IK10, PoE
- Mobile Software for Android, iOS
- CMS Software: IVMS

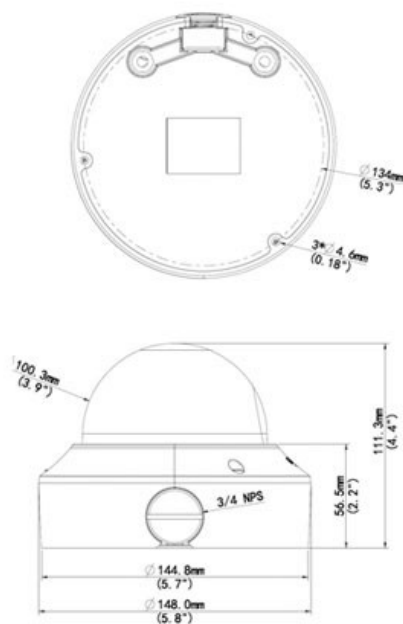

CP- VNC-V20ZR3-MD**2 MP WDR VF IR Array Vandal Dome Camera - 30Mtr.****Feature**

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
Video Compression
S/N Ratio
Video Streaming
Resolution
Video Output
Frame Rate
Privacy Mask
ICR
Audio Input
Audio Output
Alarm IN
Alarm Out
WDR
Protocol
Ethernet
IR
OSD
Micro SD
Operating Temperature
Humidity
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/3" 2MP Progressive scan CMOS
Colour: 0.02 Lux (F1.6, AGC ON), 0 Lux with IR
Auto/Manual, 1/6~1/8000 s
Auto/Manual
Auto/Manual
2.8~12mm Motorized Lens
H.264/MJPEG
>52dB
Triple
1080P@ 25fps
1 BNC, impedance 75Ω; amplitude 1 V [p-p]
1080P(1920x1080)/720P(1280x720)/D1720x576) @ 25 fps
Up to 4 areas
IR-cut filter with auto switch (ICR)
impedance 35 kΩ; amplitude 2 V [p-p]
impedance 600 Ω; amplitude 2 V [p-p]
1 channel
1 channel
Optical WDR (Upto 120dB)
L2TP,IPv4,IGMP,ICMP,ARP,TCP,UDP,DHCP,PPPoE,RTP,RTSP,Qos,NTP,FTP,HTTP,SNMP,SIP,
1 RJ45 10M/100M Base-TX Ethernet
IR Range of 30 Mtr.
Up to 8 OSDs
Up to 128 GB
-40°C ~ +60°C (-40°F ~ 140°F)
≤ 90% RH(non-condensing)
12 V DC, or PoE (IEEE802.3 af)
max.6.6 W (PoE :max.7.2 W)
IP66 & IK10
Φ148 x 111.3 mm (Ø5.8" x 4.4")
0.75 kg