


CP- VNP-2020L10-M**2MP 20x Full HD IP IR PTZ Camera****INDIGO****Main Features**

- 1/2.8" 2 MP PS Image Sensor
- Powerful 20x Optical Zoom
- Third Generation Infrared Technology
- Up to 255 Presets, 16 patrol, 16 Pattern
- Max 240°/s pan speed, 360° endless pan rotation
- IR Range of 100 Mtr., Micro SD
- Built-in 1/1 alarm in/out, IP66
- Mobile Software for Android, iOS
- CMS Software: IVMS

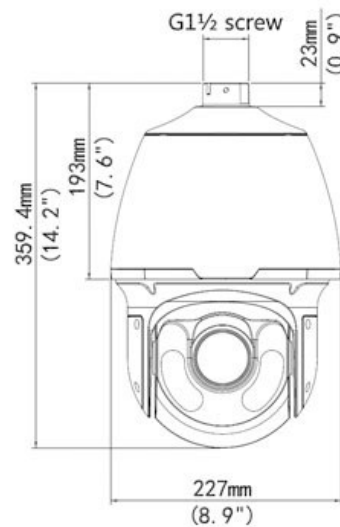

CP- VNP-2020L10-M

2MP 20x Full HD IP IR PTZ Camera



Feature

Image Sensor
Effective Pixels
S/N Ratio
Minimum Illumination
Focal Length
Focus Control
White Balance
Iris Control
Angle of View
Electronic Shutter
AGC control
Optical Zoom
Digital Zoom
Pan Travel
Tilt Travel
Presets
Preset Speed
Privacy Masking
Special Features
Day/Night: IR Cut Filter
Video Compression
Video Streaming
Audio Compression
Audio Streaming
Networking
Protocols
Alarm
Memory Slot
Operating Temperature
Weather Proof Standard
Dimension
Weight

Specification

1/2.8" 2MP CMOS
1920(H) x 1080(V)
More than 52dB
Color: 0.03 lux (F1.6, 50IRE), B/W: 0.01 lux (F1.6, 50IRE)
4.7mm~94mm
Auto / Manual
Auto / Manual
Auto/Manual; F1.6 ~ F3.3
61.9° (wide) ~ 3.5° (tele)
Auto/Manual; shutter time: 1/6 s ~ 1/8000 s
Auto / Manual
20x
Supports
360° endless, Pan Speed: 0.1°/s ~ 240°/s
-15° ~ 90°, Tilt Speed: 0.1° ~ 160°/sec
255
Pan: 300° /s; Tilt: 240° /s
Up to 8 areas
IR Range upto 100m, Up to 255 Presets, 16 Patrol, 16 Pattern
IR-cut filter with auto switch (ICR)
H.264 / MJPEG
1080P(1 ~ 25/30fps) Triple Stream
G.711a
Two way Talk Supported
10M/100M Base-TX Ethernet
L2TP,IPv4,IGMP,ICMP,ARP,TCP,UDP,DHCP,PPPoE,RTP,RTSP, NTP,FTP,HTTP,SNMP,SIP, ONVIF,
1 In/1 Out
Up to 64 GB
-40°C ~ +65°C (-40°F ~ 149°F), Humidity ≤ 90% RH(non-condensing)
IP66
Ø227 x 359.4 mm (Ø8.9" x 14.2")
5.28kg

 CP- VNP-2020L10-M**2MP 20x Full HD IP IR PTZ Camera****Feature**

Power Source

Power Consumption

Specification

24 V AC, 24 V DC

9 ~ 42W (IR:16W, heater: Max. 24 W)