


CP- VNP-3020L10-M**2MP 30x Full HD IP IR PTZ Camera****INDIGO****Main Features**

- 1/2.8" 2 MP PS Image Sensor
- Powerful 30x Optical Zoom
- Third Generation Infrared Technology
- Up to 255 Presets, 16 patrol, 16 Pattern
- Max 240°/s pan speed, 360° endless pan rotation
- Built-in 1/1 alarm in/out, IP66
- IR Range of 100 Mtr., Micro SD
- Mobile Software for Android, iOS
- CMS Software: IVMS

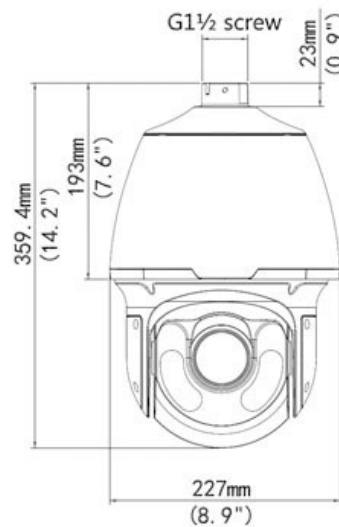

CP- VNP-3020L10-M**2MP 30x Full HD IP IR PTZ Camera****Feature**

Image Sensor
Effective Pixels
S/N Ratio
Minimum Illumination
Focal Length
White Balance
Focus Control
Angle of View
Iris Control
Electronic Shutter
AGC control
Optical Zoom
Digital Zoom
Pan Travel
Tilt Travel
Presets
Preset Speed
Special Features
Privacy Masking
Day/Night: IR Cut Filter
Video Compression
Video Streaming
Audio Compression
Audio Streaming
Networking
Protocols
Alarm
Operating Temperature
Memory Slot
Weather Proof Standard
Dimension
Weight

Specification

1/2.8" 2MP CMOS
1920(H) x 1080(V)
More than 52dB
Color: 0.03 lux (F1.6, 50IRE), B/W: 0.01 lux (F1.6, 50IRE)
4.5mm ~ 135 mm
Auto / Manual
Auto / Manual
62.9° (wide) ~ 2.3° (tele)
Auto/Manual; F1.6 ~ F3.3
Auto/Manual; shutter time: 1/6 s ~ 1/8000 s
Auto / Manual
30x
Supports
360° endless, Pan Speed: 0.1°/s ~ 240°/s
-15° ~ 90°, Tilt Speed: 0.1° ~ 160°/sec
255
Pan: 300° /s; Tilt: 240° /s
IR Range upto 100m, Up to 255 Presets, 16 Patrol, 16 Pattern
Up to 8 areas
IR-cut filter with auto switch (ICR)
H.264 / MJPEG
1080P(1 ~ 25/30fps) Triple Stream
G.711a
Two way Talk Supported
10M/100M Base-TX Ethernet
L2TP,IPv4,IGMP,ICMP,ARP,TCP,UDP,DHCP,PPPoE,RTP,RTSP, NTP,FTP,HTTP,SNMP,SIP, ONVIF,
1 In/1 Out
-40°C ~ +65°C (-40°F ~ 149°F), Humidity ≤ 90% RH(non-condensing)
Up to 64 GB
IP66
Ø227 x 359.4 mm (Ø8.9" x 14.2")
5.28kg

 CP- VNP-3020L10-M**2MP 30x Full HD IP IR PTZ Camera****Feature**

Power Source

Power Consumption

Specification

24 V AC, 24 V DC

9 ~ 42W (IR:16W, heater: Max. 24 W)