
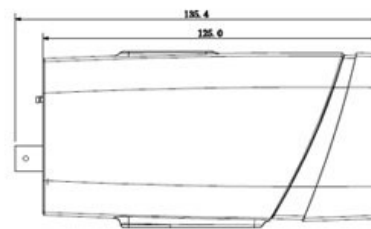


CP-UNC-BE13-MD**1.3 MP HD IP Box Camera****Main Features**

- 1/3" 1.3Megapixel PS CMOS Image Sensor
- H.264 & MJPEG dual-stream encoding
- Max 25/30fps@1.3M(1280×960)
- WDR(120dB), Day/Night(ICR), 3D-DNR, AWB, AGC, BLC
- C/CS Mount Lens
- Supports PoE, Micro SD Card
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMs Pro, vOptimus Pro



CP-UNC-BE13-MD

1.3 MP HD IP Box Camera

Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control(AGC)
Video Compression
Back Light Compensation
S/N Ratio
Video Streaming
Resolution
Video Output
Privacy Mask
ICR
Audio Input
Audio Output
Audio Compression
Alarm IN
Alarm Out
Protocol
Smart Detection
Ethernet
User Account
Smart Phone
Micro SD
Operating Temperature
Power Source
Power Consumption
Regulatory
Dimension
Weight

Specification

1/3" 1.3Megapixel CMOS
0.01Lux/F1.2 (Color), 0.001Lux/F1.2(B/W)
Auto/Manual, 1/3(4)~1/10000s
Auto/Sunny/Night/Outdoor/Customized
C/CS Mount Lens
Auto/Manual
H.264/H.264B/H.264H/ MJPEG
BLC / HLC / WDR(120dB)
More than 50 dB
Main Stream:1.3M/720P(1 ~ 25/30fps), Sub Stream: D1/CIF(1 ~ 25/30fps), Third Stream: 720P(1~25/30fps)
1.3M(1280×960)/720P(1280×720)/D1(704×576/704×480)/CIF(352
1 channel BNC (1.0Vp-p, 75Ω)
Up to 4 areas
Auto(ICR)/Color/B/W
1 Ch.
1 Ch.
G.711a / G.711u/AAC
2 Ch.
1 Ch.
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF Profile S
Tripwire, Intrusion, Abandoned/Missing, Scene Change, Audio detect, Face detect
RJ-45 (10/100Base-T)
20 users
iPhone, iPad, Android, Windows Phone
Micro SD, Max 128GB
-30°C~+60°C, Less than 95% RH
DC12V, PoE(802.3af)
1 channel BNC (1.0Vp-p, 75Ω)
CE, FCC and RoHS
74.1mm× 65.5mm× 135.4mm
0.3Kg