
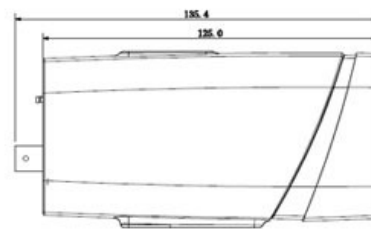


CP-UNC-BH30-MD**3 MP WDR Box Camera****Main Features**

- 1/3" 3MP PS CMOS Image Sensor
- Max 25/30fps@3MP
- H.264 and MJPEG dual-stream encoding
- Ultra WDR, Ultra Defog, ROI, EIS, Day/Night(ICR), 3D-DNR, AWB, AGC, BLC
- C/CS Mount Lens, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP- UNC-BH30-MD

3 MP WDR Box Camera

Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control(AGC)
S/N Ratio
Back Light Compensation
Video Compression
Video Streaming
Resolution
Privacy Mask
ICR
Audio Input
Audio Output
Audio Compression
Alarm IN
Alarm Out
Protocol
Smart Detection
Ethernet
User Account
Smart Phone
Micro SD
Operating Temperature
Power Source
Power Consumption
Dimension
Weight

Specification

1/3" 3MP Progressive scan CMOS
Color: 0.1Lux/F1.2, B/W: 0.01Lux/F1.2
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
C/CS Mount Lens
Auto/Manual
More than 52dB
BLC/ HLC/ WDR(120dB)
H.264/MJPEG
Main Stream:3M/1080P (1~25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps), Third Stream: 1080P/720P/D1(1 ~ 25/30fps)
3M(2048× 1536)/1080P(1920× 1080) / 720P(1280× 720) /D1(704× 576) /CIF(352× 288)
Up to 4 areas
Auto(ICR)/Color/B/W
2 Channel
1 Channel
G.711a / G.711u
2 Channel In
1 Channel Out
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI
Tripwire, Intrusion, Scene Change, Missing/Abandoned, Audio detect, Face detect
RJ-45 (10/100/1000Base-T)
20 Users
iPhone, iPad, Android, Windows Phone
Max 64GB
-20°C~+60°C , Less than 90%RH
DC12V(AC24V optional), PoE (802.3af)
Max 10W
71.4mm×65.5mm×135.4mm
300g