
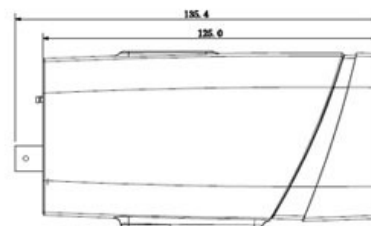


CP- UNC-BH4K12-M**12 Megapixel Ultra HD IP Box Camera****Main Features**

- 1/2.3" 12MP PS CMOS Image Sensor
- Max 15fps@12MP(4000x3000)
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Ultra Defog, ROI, EIS, Smart Detection
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP-UNC-BH4K12-M

12 Megapixel Ultra HD IP Box Camera

Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control(AGC)
S/N Ratio
Back Light Compensation
Video Streaming
Video Output
Resolution
Privacy Mask
ICR
Audio Input
Audio Compression
Audio Output
Alarm IN
Alarm Out
Interface

Specification

1/2.3" 12MP progressive scan CMOS
Color: 0.01Lux/F1.2, B/W: 0.001Lux/F1.2
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
C/CS Mount
Auto/Manual
More than 50dB
BLC / HLC / DWDR
Main Stream: 12M(1~15fps)/8M/1080P (1~25/30fps), Sub Stream: D1/CIF(1 ~ 25/30fps),
Third Stream: 1080P/720P/D1(1 ~ 50/60fps)
1 channel BNC (1.0Vp-p,75Ω)
4K(3840× 2160)/3M(2048× 1536)/1080P(1920× 1080) /720P(1280× 720) /D1(704× 576/704× 480) / CIF(352× 288/352× 240)
Up to 4 areas
Auto(ICR)/Color/B/W
1 Ch.
G.711a / G.711u
1 Ch.
2 Ch.
1 Ch.
1 RS485
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI
Tripwire, Intrusion, Scene Change, Face detect, Audio Detect
RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android, Windows Phone
Micro SD, Max 128GB
-40°C~+60°C, Less than 95% RH
DC12V/AC24V, PoE (802.3af)
Max12W (ABF&ICR on)

 CP- UNC-BH4K12-M**12 Megapixel Ultra HD IP Box Camera****Feature**

Dimension

Weight

Specification

74.1mm × 65.5mm × 135.4mm

0.3Kg.