


CP- UNC-TB30FL3-M

3 MP Full HD IR Bullet Camera - 30Mtr.

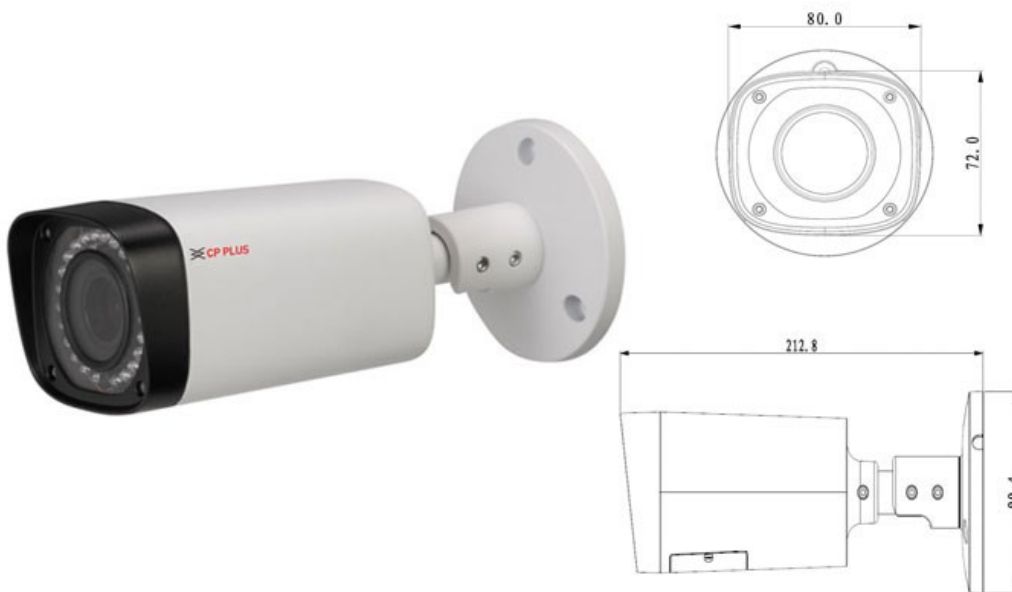

Main Features

- 1/3" 3MP PS CMOS Image Sensor
- Max 20fps@3M and 25/30fps@1080P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 2.7 -12mm Varifocal Lens
- IR Range of 30 Mtrs, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMs Pro, vOptimus Pro



CP- UNC-TB30FL3-M

3 MP Full HD IR Bullet Camera - 30Mtr.

Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
S/N Ratio
Back Light Compensation
Video Compression
Video Streaming
Resolution
Privacy Mask
ICR
Protocol
Ethernet
User Account
Smart Phone
IR
Micro SD
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/3" 3MP Progressive scan CMOS
0.01Lux/F1.4(Color), 0Lux/F1.4(IR on)
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
Auto/Manual
2.7 -12mm Varifocal Lens
More than 50dB
BLC/ HLC/ DWDR
H.264/MJPEG
Main Stream: 3M(1 ~ 20fps)/1080P (1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
3M(2048x1536) / 1080P(1920x1080) / 1.3M(1280x960) / 720P(1280x720) / D1
(704x576/704x480) / CIF(352x288/352x240)
Up to 4 areas
Auto(ICR)/Color/B/W
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, PSIA, CGI
RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android, Windows Phone
IR Range of 30 Mtr.
Micro SD , Max 128GB
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
<5.5W
IP67
72mm × 80mm × 212.8mm
650g