
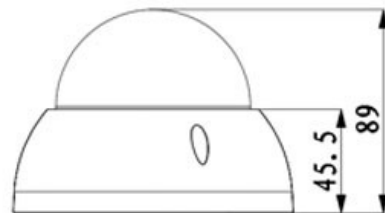


CP- UNC-VB20FL3-MD**2 MP Full HD IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/3" 2MP PS CMOS Image Sensor
- Max 25fps@1080P
- H.264 and MJPEG dual-stream encoding
- WDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- 2.7~12mm varifocal lens
- IR Range of 30 Mtrs, IP66, IK10, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMs Pro, vOptimus Pro



CP- UNC-VB20FL3-MD**2 MP Full HD IR Vandal Dome Camera - 30Mtr.****Feature**

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
Back Light Compensation
S/N Ratio
Video Compression
Video Streaming
Resolution
Privacy Mask
ICR
Audio Input
Audio Compression
Audio Output

Protocol

Ethernet
User Account
IR
Smart Phone
Micro SD
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/3" 2MP Progressive scan CMOS
0.01Lux/F2.1(Color), 0Lux/F2.1(IR on)
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
Auto/Manual
2.7mm~12mm varifocal Lens
BLC/ HLC/ WDR(120dB)
More than 50dB
H.264/ H.264H/ H.264B/ MJPEG
Main Stream: 1080P/720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
1080P(1920x1080) / 1.3M(1280x960) / 720P(1280x720) / D1(704x576/704x480) /CIF
Up to 4 areas
Auto(ICR)/Color/B/W
1Ch.
G.711a / G.711u
1Ch.

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI

RJ-45 (10/100Base-T)
20 Users
IR Range of 30 Mtr.
iPhone, iPad, Android, Windows Phone
Micro SD, Max 64GB
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
Max 4W
IP66 & IK10
φ122mm× 89mm
0.5kg