
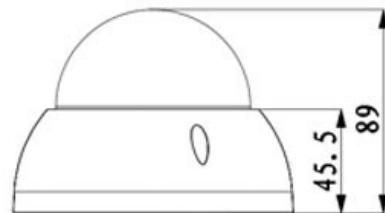


CP- UNC-VB20FL3-VM**2 MP Full HD IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/2.8" 2MP PS CMOS Image Sensor
- Max 25fps@1080P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- 2.7~12mm varifocal lens
- IR Range of 30 Mtrs, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMs Pro, vOptimus Pro



CP- UNC-VB20FL3-VM

2 MP Full HD IR Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control(AGC)
S/N Ratio
Video Compression
Back Light Compensation
Video Streaming
Resolution
Privacy Mask
ICR
Audio Input
Audio Compression
Audio Output

Protocol

Ethernet

User Account

Smart Phone

IR

Micro SD

Operating Temperature

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight

Specification

1/2.8" 2MP Progressive scan CMOS
0.01Lux/F1.4(Color); 0Lux/F1.4(IR on)
Auto/Manual, 1/3(4)~1/100000s
Auto/Manual
2.7mm~12mm varifocal Lens
Auto/Manual
More than 50dB
H.264/ H.264H/ MJPEG
BLC/ HLC/ DWDR
Main Stream: 1080P/720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
1080P(1920x1080) / 1.3M(1280x960) / 720P(1280x720) / D1(704x576/704x480) /CIF
Up to 4 areas
Auto(ICR)/Color/B/W
1Ch.
G.711a / G.711u
1Ch.
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI
RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android, Windows Phone
IR Range of 30 Mtr.
Micro SD, Max 128GB
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
Max 4W
IP67 & IK10
φ122mm× 89mm
0.5kg