


CP- UNC-VB20ZL3-VMD**2 MP Full HD WDR IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/2.7" 2MP PS CMOS Image Sensor
- Max 25fps@1080P
- H.264 and MJPEG dual-stream encoding
- WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- 2.7~12mm motorized lens
- IR Range of 30 Mtrs, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro

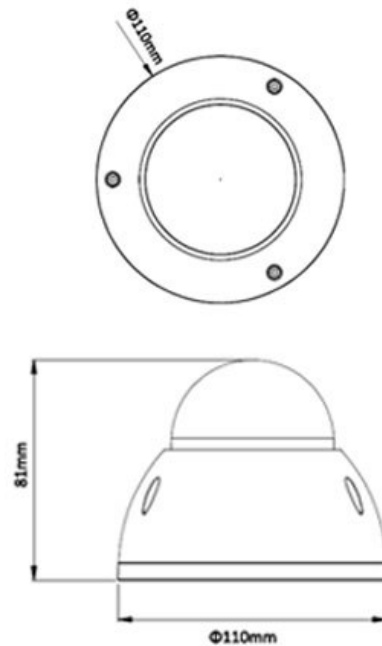

CP- UNC-VB20ZL3-VMD

2 MP Full HD WDR IR Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
Back Light Compensation
Video Compression
S/N Ratio
Video Streaming
Resolution
Privacy Mask
ICR
Audio Input
Audio Compression
Audio Output
Alarm IN
Alarm Out

Specification

1/2.7" 2MP Progressive scan CMOS
0.01Lux/F1.4(Color), 0Lux/F1.4(IR on)
Auto/Manual, 1/3(4)~1/100000s
Auto/Manual
Auto/Manual
2.7mm~12mm motorized Lens
BLC/ HLC/ WDR(120dB)
H.264/ H.264H/ H.264B/ MJPEG
More than 50dB
Main Stream: 1080P/720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
1080P(1920x1080) / 1.3M(1280x960) / 720P(1280x720) / D1(704x576/704x480) /CIF
Up to 4 areas
Auto(ICR)/Color/B/W
1Ch.
G.711a / G.711u
1Ch.
1 channel
1 channel

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI

RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android, Windows Phone
IR Range of 30 Mtr.
Micro SD, Max 128GB
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
Max 7.5W
IP67 & IK10
φ110mm× 81mm
0.5kg

Protocol

Ethernet

User Account

Smart Phone

IR

Micro SD

Operating Temperature

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight