
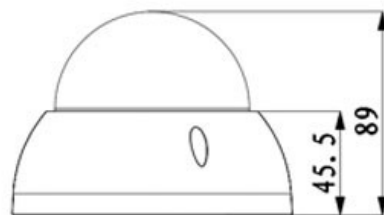


CP- UNC-VB30FL3-M**3 MP IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/3" 3MP PS CMOS Image Sensor
- Max 20fps@3M and 25/30fps@1080P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 2.7 -12mm Varifocal Lens
- IR Range of 30 Mtrs, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMs Pro, vOptimus Pro



CP-UNC-VB30FL3-M

3 MP IR Vandal Dome Camera - 30Mtr.

Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
Back Light Compensation
S/N Ratio
Video Compression
Video Streaming
Resolution
Privacy Mask
ICR
Protocol
Ethernet
User Account
Smart Phone
IR
Micro SD
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/3" 3MP Progressive scan CMOS
0.01Lux/F1.4(Color), 0Lux/F1.4(IR on)
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
Auto/Manual
2.7 -12mm Varifocal Lens
BLC/ HLC/ DWDR
More than 50dB
H.264/MJPEG
Main Stream: 3M(1 ~ 20fps)/1080P (1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
3M(2048x1536) / 1080P(1920x1080) / 1.3M(1280x960) / 720P(1280x720) / D1
(704x576/704x480) / CIF(352x288/352x240)
Up to 4 areas
Auto(ICR)/Color/B/W
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP,
DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI
RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android, Windows Phone
IR Range of 30 Mtr.
Micro SD , Max 128GB
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
<5.5W
IP67 & IK10
φ122mm × 89mm
500g