
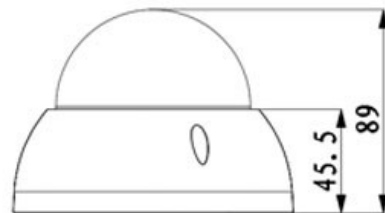


CP- UNC-VB30ZL3-M**3 MP Full HD IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/3" 3MP PS CMOS Image Sensor
- Max 20fps@3M and 25/30fps@1080P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 2.7 -12mm Motorized Lens
- IR Range of 30 Mtrs, IP66, IK10, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMs Pro, vOptimus Pro



CP-UNC-VB30ZL3-M

3 MP Full HD IR Vandal Dome Camera - 30Mtr.

Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
S/N Ratio
Video Compression
Back Light Compensation
Video Streaming
Resolution
Privacy Mask
ICR
Audio Input
Audio Output
Audio Compression
Protocol
Ethernet
User Account
Smart Phone
IR
Micro SD
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/3" 3MP Progressive scan CMOS
0.01Lux/F1.4(Color), 0Lux/F1.4(IR on)
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
Auto/Manual
2.7 -12mm Motorized Lens
More than 50dB
H.264/ H.264H/ MJPEG
BLC/ HLC/ DWDR
Main Stream: 3M(1 ~ 20fps)/1080P (1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
3M(2048x1536) / 1080P(1920x1080) / 1.3M(1280x960) / 720P(1280x720) / D1
(704x576/704x480) / CIF(352x288/352x240)
Up to 4 areas
Auto(ICR)/Color/B/W
1 Channel
1 Channel
G.711a / G.711u
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP,
DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, PSIA, CGI
RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android, Windows Phone
IR Range of 30 Mtr.
Max 64GB
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
<8.5W
IP66 & IK10
φ122mm × 89mm
500g