
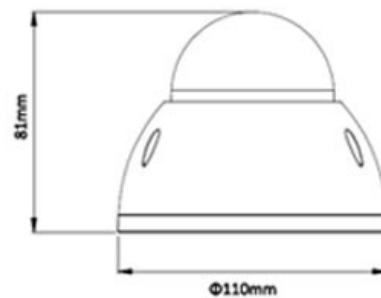


CP- UNC-VD20L3-MD**2MP Full HD WDR IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/3" 2MP PS CMOS Image Sensor
- Max 25/30fps@1080P(1920×1080)
- WDR(120dB), Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (2.8mm, 6mm optional)
- IR Range of 30 Mtrs, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP-UNC-VD20L3-MD

2MP Full HD WDR IR Vandal Dome Camera - 30Mtr.

Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
Video Compression
Back Light Compensation
S/N Ratio
Video Streaming
Resolution
Privacy Mask
ICR
Audio Input
Audio Output
Audio Compression
Alarm IN
Alarm Out

Specification

1/3" 2MP Progressive scan CMOS
0.01Lux/F2.0 (Color), 0Lux/F2.0(IR on)
Auto/Manual, 1/3(4)~1/10000s
Auto
Auto/Manual
3.6mm (2.8mm, 6mm optional)
H.264/H.264H/H.264B/MJPEG
BLC/ HLC/ WDR(120dB)
More than 50dB
Main Stream: 1080P/720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps), Third Stream: 720P(1-13/4fps)
1080(1920×1080) / 720P(1280×720) / D1(704×576/704×480) /CIF(352×288/352×240)
Up to 4 areas
Auto(ICR)/Color/B/W
1 Channel
1 Channel
G.711a/G.711u/PCM
1 Channel
1 Channel

Protocol

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI

Smart Detection

Tripwire, Intrusion, Scene Change, Missing/Abandoned, Audio detect, Face detect

Ethernet

RJ-45 (10/100Base-T)

User Account

20 Users

IR

IR Range of 30 Mtr.

Smart Phone

iPhone, iPad, Android, Windows Phone

Micro SD

Micro SD Max 128GB

Operating Temperature

-40°C~+60°C, Less than 95% RH

Power Source

DC12V, PoE (802.3af)

Power Consumption

<4W

Weatherproof Standard

IP67 & IK10

 CP- UNC-VD20L3-MD

2MP Full HD WDR IR Vandal Dome Camera - 30Mtr.

Feature

Dimension

Weight

Specification

Φ 110mm × 81mm

0.33kg