


CP- UNP-3040L10**4MP 30x WDR IP IR PTZ Dome Camera - 100 Mtr.****Main Features**

- 1/2.8" CMOS Image sensor
- Max. 25/30fps@4M(2592×1520), 50/60fps@1080P resolution
- Powerful 30x Optical and 16x Digital zoom
- H.265 and H.264 Encoding, Ultra-low bit rate transmission
- WDR, Day/Night(ICR), Ultra DNR, Auto iris, Auto focus
- Up to 300 Presets, 8 Tour, 5 Pattern, 5 Auto scan
- Max 400°/s pan speed, 360° endless pan rotation
- Built-in 2/1 alarm in/out, IP66, PoE , Micro SD, 100 Mtr. IR
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMs Pro, vOptimus Pro

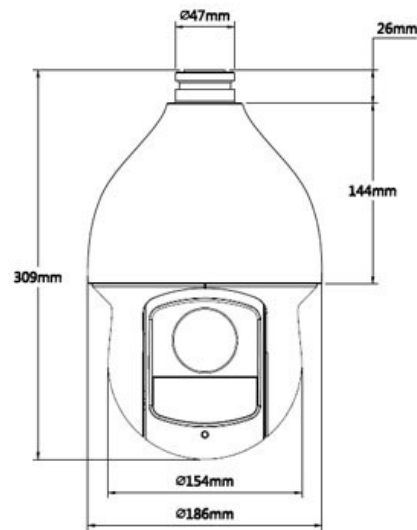

CP- UNP-3040L10**4MP 30x WDR IP IR PTZ Dome Camera - 100 Mtr.****Feature**

Image Sensor
Effective Pixels
Video Output
S/N Ratio
Minimum Illumination
Focal Length
White Balance
Focus Control
Close Focus Distance
Angle of View
Electronic Shutter
AGC control
Back Light Compensation
Optical Zoom
Digital Zoom
Pan Travel
Tilt Travel
Presets
Preset Speed
Privacy Masking
Special Features
Power up Action
Time Task
Idle Motion
Day/Night: IR Cut Filter
Video Compression

Specification

1/2.8" CMOS
2688(H) x 1520(V) 4Mp
BNC(1.0Vp-p/75Ω), PAL / NTSC
More than 55dB
Color: 0.005Lux@F1.6; B/W: 0.0005Lux@F1.6
4.5mm ~ 135.0mm
Auto, ATW, Indoor, Outdoor, Manual
Auto / Manual
1100mm~1000mm
H: 60° ~ 2.2°
1/50 ~ 1/30,000s
Auto / Manual
BLC / HLC / WDR
30x
16x
0° ~ 360° endless, Pan Speed: 0.1° ~ 300°/sec
-15° ~ 90°, auto flip 180°, Tilt Speed: 0.1° ~ 200°/sec
300
Pan: 400° /s; Tilt: 300° /s
Up to 24 areas
IR Range of 100 Mtr., Up to 300 Presets, 8 Tour, 5 Pattern, 5 Auto scan
Auto restore to previous PTZ and lens status after power failure
Auto activation of Preset/Pan/Scan/Tour/Pattern by preset-time
Activate Preset/ Pan/ Scan/ Tour/ Pattern if there is no command in the specified period
Auto(ICR) / Color / B/W
H.265 / H.264 / MJPEG

Main Stream: 4M/3M(1~25/30fps)/1080P(1~50/60fps)/1.3M/720P(1~25/30fps), Sub Stream1: D1/CIF(1 ~ 25/30fps), Sub Stream 2: 1080P /960P/720P(1 ~ 25/30fps)

G.711a / G.711Mu(32kbps)/ PCM(128kbps)
1/1 channel In/Out
Tripwire, Intrusion, Abandoned Object Detection, Missing Object Detection, Face Detection

CP- UNP-3040L10**4MP 30x WDR IP IR PTZ Dome Camera - 100 Mtr.****Feature**

Networking
Protocols
Tracking Trigger Mode
Alarm
Tracking Trigger Event
Max Remote Users
Smart Phone
Operating Temperature
Memory Slot
Weather Proof Standard
Dimension
Weight
Power Source
Power Consumption
Regulatory

Specification

RJ-45 (10/100Base-T), 1RS485
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE
Manual / Auto (alarm triggered)
2/1 channel In/Out
Targeting, Zoom, Tracking, Recording, Snapshot, Alarm and etc.
20 users
iPhone, iPad, Android, Windows Phone
PoE: -30°C ~ 60°C / Less than 90% RH, AC24V: -40°C ~ 70°C / Less than 90% RH
Micro SD, Max 128GB
IP66
Φ186mm × 309mm
3.5 kg
AC24V, POE plus(802.3at)
PoE: 13W, 20W (IR on), AC24V: 13W, 23W (IR on)
CE, FCC, RoHS & UL