


CP-UNC-TA13L3**1.3 MP HD IR Bullet Camera - 30Mtr.****Main Features**

- 1/3" 1.3MP PS CMOS Image Sensor
- Max 25fps@1.3MP
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (6mm optional)
- IR Range of 30 Mtrs, IP66, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMs Pro, vOptimus Pro

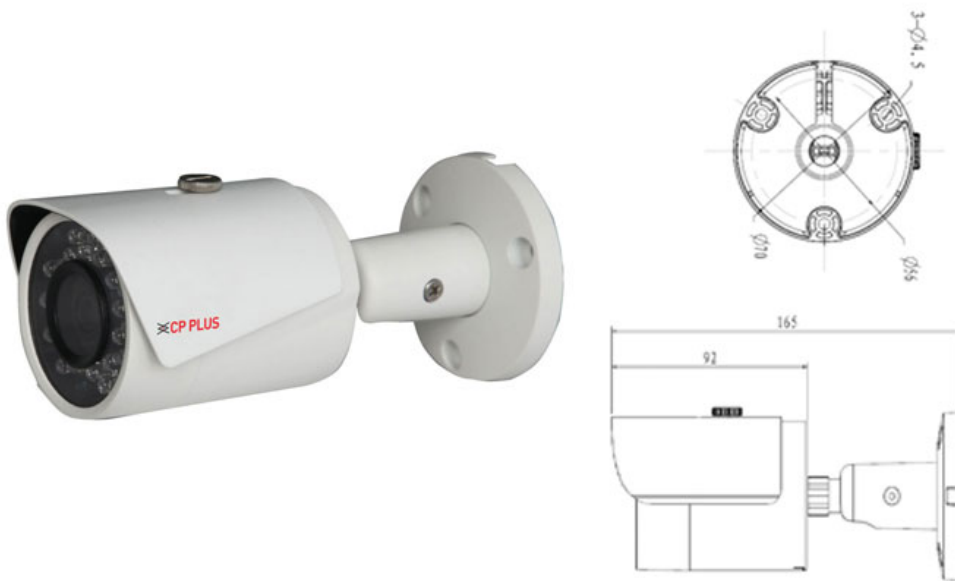

CP- UNC-TA13L3**1.3 MP HD IR Bullet Camera - 30Mtr.****Feature**

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
Back Light Compensation
S/N Ratio
Video Compression
Video Streaming
Resolution
Privacy Mask
ICR

Protocol

Ethernet
NMS
User Account
Smart Phone
IR
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/3" 1.3MP Progressive scan CMOS
0.01Lux/F2.1(Color), 0Lux/F2.1(IR on)
Auto/Manual, 1s~1/100000s
Auto/Manual
Auto/Manual
3.6mm(6mm optional)
BLC/ HLC/ DWDR
More than 50dB
H.264/ H.264H/ H.264B/ MJPEG
Main Stream: 1.3M/720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
1.3M(1280x960) /720P(1280x720) / D1(704x576/704x480) /CIF(352x288/352x240)
Up to 4 areas
Auto(ICR)/Color/B/W

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI, SIP

RJ-45 (10/100Base-T)
Support
20 Users
iPhone, iPad, Android, Windows Phone
IR Range of 30 Mtr.
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
Max 3.8W
IP67
Φ154mm × 60mm × 59mm
0.29Kg(with package 0.42Kg)