
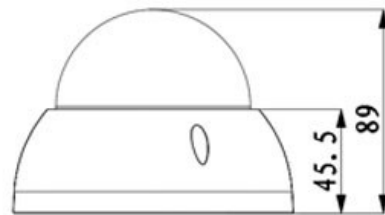


CP- UNC-VB30ZL3-VM**2 MP Full HD IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/3" 3MP PS CMOS Image Sensor
- Max 20fps@3M and 25/30fps@1080P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 2.7~12mm Motorized lens
- IR Range of 30 Mtrs, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMs Pro, vOptimus Pro



CP- UNC-VB30ZL3-VM**2 MP Full HD IR Vandal Dome Camera - 30Mtr.****Feature**

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control(AGC)
S/N Ratio
Video Compression
Back Light Compensation
Video Streaming
Resolution
Privacy Mask
ICR
Audio Input
Audio Output
Audio Compression
Alarm IN
Alarm Out
Protocol
Ethernet
User Account
Smart Phone
IR
Micro SD
Ingress Protection
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension

Specification

1/3" 3MP Progressive scan CMOS
0.1Lux/F1.4(Color), 0Lux/F1.4(IR on)
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
2.7mm~12mm Motorized Lens
Auto/Manual
More than 50dB
H.264/ H.264H/ MJPEG
BLC/ HLC/ DWDR
Main Stream: 3M(1 ~ 20fps)/1080P (1 ~ 25/30fps), Sub Stream D1/CIF(1 ~ 25/30fps)
3M(2304x1296)/1080P(1920x1080)/1.3M(1280x960)/720P(1280x720)/D1
(704x576/704x480)/CIF(352x288/352x240)
Up to 4 areas
Auto(ICR)/Color/B/W
1 channel
1 channel
G.711a / G.711u
1 channel
1 channel
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP,
DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour
RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android, Windows Phone
IR Range of 30 Mtr.
Max 128GB
IP67
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
Max 8.5W
IP67 & IK10
φ122mm × 89mm



CP- UNC-VB30ZL3-VM

2 MP Full HD IR Vandal Dome Camera - 30Mtr.



Feature

Weight

Specification

0.5kg



**Product casing and specifications are subject to change without prior notice*