
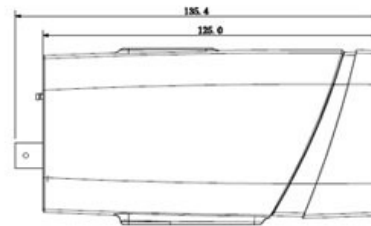


CP- UNC-BE20-MD**2 MP Full HD WDR IP Box Camera****Main Features**

- 1/2.7" 2Megapixel PS CMOS Image Sensor
- H.264 & MJPEG dual-stream encoding
- Max 25/30fps@1080P(1920×1080)
- WDR(120dB), Day/Night(ICR), 3D-DNR, AWB, AGC, BLC
- C/CS Mount Lens
- Supports PoE, Micro SD Card
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMs Pro, vOptimus Pro



CP- UNC-BE20-MD

2 MP Full HD WDR IP Box Camera

Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control(AGC)
Back Light Compensation
Video Compression
S/N Ratio
Video Streaming
Resolution
Privacy Mask
ICR
Audio Input
Audio Compression
Audio Output
Alarm IN
Alarm Out
Protocol
Smart Detection
Ethernet
User Account
Smart Phone
Micro SD
Operating Temperature
Power Source
Power Consumption
Regulatory
Dimension
Weight

Specification

1/2.7" 2 Megapixel CMOS
0.02Lux/F2.0(Color), 0.02Lux/F2.0(B/W)
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
C/CS Mount Lens
Auto/Manual
BLC / HLC / WDR(120dB)
H.264/MJPEG
More than 50 dB
Main Stream:1080P/720P(1 ~ 25/30fps), Sub Stream: D1/CIF(1 ~ 25/30fps), Third Stream: 720P(1-13/4fps)
1080P(1920×1080)/720P(1280×720)/D1(704×576)/CIF(352×288)
Up to 4 areas
Auto(ICR)/Color/B/W
1 Ch.
G.711a/ G.711u/ AAC
1 Ch.
1 Ch.
1 Ch.
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF Profile S
Tripwire, Intrusion, Scene Change, Face Detect
RJ-45 (10/100Base-T)
20 users
iPhone, iPad, Android, Windows Phone
Micro SD, Max 128GB
-40°C~+60°C, Less than 90% RH
DC12V, PoE(802.3af)
Max 10W (ABF & ICR on)
CE, FCC and RoHS
74.1mm × 65.5mm × 135.4mm
0.3kg