
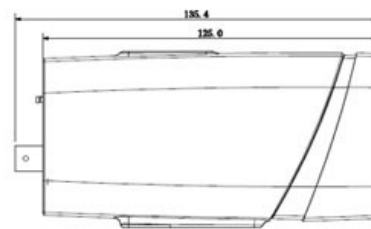



CP- UNC-BE40-MD**4MP WDR Box Camera****Main Features**

- 1/3" 4MP PS CMOS Image Sensor
- Max 20fps@4MP and 25/30fps@3MP
- H.264 and MJPEG Triple-Stream Encoding
- WDR(120dB), Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- C/CS Mount Lens
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP-UNC-BE40-MD

4MP WDR Box Camera

Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
Video Compression
S/N Ratio
Back Light Compensation
Video Streaming
Resolution
Privacy Mask
ICR
Audio Input
Audio Compression
Audio Output

Specification

1/3" 4MP Progressive scan CMOS
0.01Lux/F2.0 (Color), 0Lux/F2.0(IR on)
Auto/Manual, 1/3(4)~1/10000s
Auto
Auto/Manual
3.6 mm Lens
H.264/H.264H/H.264B/MJPEG
More than 50dB
BLC/ HLC/ WDR(120dB)
Main Stream: 4M(1~20fps)/3M(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps), Third Stream: 720P(1~5/8fps) WDR on, 720P(1~18/2fps) WDR off
4M(2560x1440) / 3M(2048x 1536)/1080P(1920x 1080) / 720P(1280x 720) /D1(704x 576) /
Up to 4 areas
Auto(ICR)/Color/B/W
1 Channel
G.711a / G.711u/ AAC
1 Channel
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI
Tripwire, Intrusion, Scene Change, Missing/Abandoned, Audio detect, Face detect
RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android, Windows Phone
Micro SD card, Max 128GB
-40°C~+60°C, Less than 95% RH
DC12V/AC24V, PoE (802.3af)
< 6.5W (ABF&ICR on)
74.1mm× 65.5mm× 135.4mm
0.3kg