
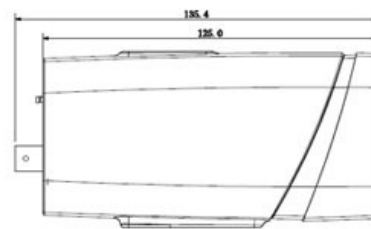


CP- UNC-BH20-MD**2 MP WDR Box Camera****Main Features**

- 1/1.9" 2MP PS CMOS Image Sensor
- Max 25/30fps@1080P
- Support H.264,MJPEG dual codec
- Ultra WDR(120dB), Ultra Defog, ROI, EIS, Day/Night(ICR), 3D-DNR, AWB, AGC, BLC
- C/CS Mount Lens, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP- UNC-BH20-MD

2 MP WDR Box Camera

Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control(AGC)
Back Light Compensation
Video Compression
S/N Ratio
Video Streaming
Resolution
Privacy Mask
ICR
Audio Input
Audio Compression
Audio Output
Alarm IN
Alarm Out

Specification

1/1.9" 2MP Progressive scan CMOS
0.002Lux/F1.2 (Color), 0.0002Lux/F1.2(B/W)
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
C/CS Mount Lens
Auto/Manual
BLC/ HLC/ WDR(120dB)
H.264/MJPEG
More than 50dB
Main Stream:1080P/720P(1 ~ 50/60fps), Extra Stream: D1/CIF(1 ~ 25/30fps), Third Stream: 1080P/720P/D1(1 ~ 25/30fps)
1080P(1920× 1080) / 720P(1280× 720) /D1(704× 576) /CIF(352× 288)
Up to 4 areas
Auto(ICR)/Color/B/W
1 Channel
G.711a / G.711u
1 Channel
2 Channel In
1 Channel Out

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI

Tripwire, Intrusion, Scene Change, Missing/Abandoned, Audio detect, Face detect
RJ-45 (10/100/1000Base-T)
20 Users
iPhone, iPad, Android, Windows Phone
Max 64GB
-30°C~+60°C, Less than 95% RH
DC12V(AC24V), PoE (802.3af)
Max 3.5W
74.1mm×65.5mm×135.4mm
300g

Protocol

Smart Detection

Ethernet

User Account

Smart Phone

Micro SD

Operating Temperature

Power Source

Power Consumption

Dimension

Weight