
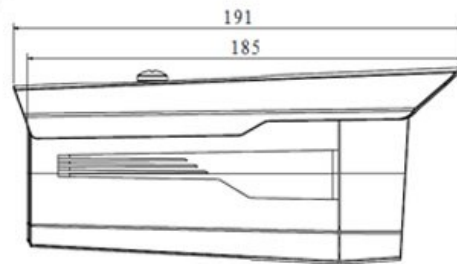


CP- UNC-TA10L6S**1 MP HD IP IR Bullet Camera - 60Mtr.****Main Features**

- 1/4" 1MP PS CMOS Image Sensor
- 25/30fps@720P(1280×720)
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (6mm optional)
- Array Range of 60 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMs Pro, vOptimus Pro



CP- UNC-TA10L6S**1 MP HD IP IR Bullet Camera - 60Mtr.****Feature**

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
Back Light Compensation
S/N Ratio
Video Compression
Resolution
Frame Rate
Privacy Mask
ICR
Protocol
Ethernet
User Account
Smart Phone
IR
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/4" 1MP Progressive scan CMOS
0.1Lux/F2.1(Color), 0Lux/F2.1(IR on)
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
Auto/Manual
3.6mm fixed lens (6mm optional)
BLC/ HLC/ DWDR
More than 50dB
H.264 / MJPEG
720P(1280×720)/ D1(704×576/704×480) /CIF(352×288/352×240)
Main Stream :720P(1 ~ 25/30fps), Sub Stream :D1/CIF(1 ~ 25/30fps)
Up to 4 areas
Auto(ICR)/Color/B/W
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,
RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android, Windows Phone
IR Range of 60 Mtr.
-30°C~+60°C , Less than 95%RH
DC12V
Max 4W
IP67
191mm × 90mm × 82mm
0.45Kg