
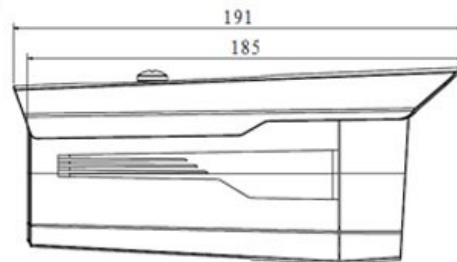


CP- UNC-TA30L6S**3 MP Full HD IP Bullet Camera - 60Mtr.****Main Features**

- 1/3" 3MP PS CMOS Image Sensor
- Max 20fps@3MP, 25/30fps@1080P
- H.264 plus and H.264 dual-stream encoding
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- 2.8mm fixed lens (3.6mm 6mm optional)
- IR Range of 60 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMs Pro, vOptimus Pro



CP- UNC-TA30L6S**3 MP Full HD IP Bullet Camera - 60Mtr.****Feature**

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control(AGC)
Back Light Compensation
S/N Ratio
Video Compression
Video Streaming
Resolution
Privacy Mask
Protocol
Ethernet
User Account
Smart Phone
IR
Ingress Protection
Operating Temperature
Power Source
Power Consumption
Dimension
Weight

Specification

1/3" 3MP Progressive scan CMOS
0.1Lux/F2.0(Color), 0Lux/F2.0(IR on)
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
2.8mm(3.6mm 6mm optional)
Auto/Manual
BLC/ HLC/ DWDR
More than 50dB
H.264+/H.264
Main Stream:3M(1 ~ 20fps)/1080P(1 ~ 25/30fps),Sub Stream:D1(1 ~ 25/30fps)
3M(2048×1536)/1080P(1920×1080)/720P(1280×720)/ D1(704×576/704×480) /CIF
Up to 4 areas
IPv4/IPv6, HTTP, HTTPS, TCP/IP, UDP, UPnP, ICMP, IGMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS
RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android, Windows Phone
IR Range of 60 Mtr.
IP67
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)
<4W(IR on)
191mm × 90mm × 82mm
0.45Kg