


CP- UNC-VD20L3-D**2 MP Full HD IR WDR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/2.7" 2Megapixel PS CMOS Image Sensor
- Max 25/30fps@1080P
- H.264 and MJPEG dual-stream encoding
- WDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Smart Detection supported
- 3.6mm fixed lens (2.8mm, 6mm optional)
- IR Range of 30 Mtrs, IP67, IK10, Card, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro

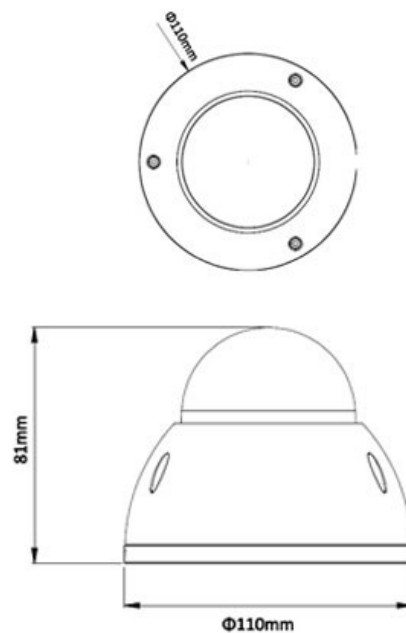

CP- UNC-VD20L3-D

2 MP Full HD IR WDR Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
Back Light Compensation
S/N Ratio
Video Streaming
Resolution
Privacy Mask
ICR

Protocol

Smart Detection
Ethernet
User Account
IR
Smart Phone
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/2.7" 2Megapixel progressive scan CMOS
0.01Lux/F2.0(Color), 0Lux/F2.0(IR on)
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
Auto/Manual
3.6mm(6mm optional)
BLC / HLC / WDR(120dB)
More than 50dB
Main Stream: 1080P/720P(1~25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps), Third Stream: 720P(1~13/4fps)
1080P(1920× 1080)/ 720P(1280× 720) / D1(704× 576/704× 480)/ CIF(352× 288/352× 240)
Up to 4 areas
Auto(ICR)/Color/B/W
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI
Tripwire, Intrusion, Scene Change, Face detect
RJ-45 (10/100Base-T)
20 Users
IR Range of 30 Mtr.
iPhone, iPad, Android, Windows Phone
-40°C~+60°C, Less than 95% RH
DC12V, PoE (802.3af)
Max 4W
IP67 & IK10
Φ110mm × 81mm
0.33kg(with package 0.47kg)