


CP- UNC-VD40L3-D**4 MP Full HD WDR IR Vandal Dome Camera - 30Mtr.****ORANGE****Main Features**

- 1/3" 4Megapixel PS CMOS Image Sensor
- 20fps@4MP, 25/30fps@3MP
- H.264 and MJPEG dual-stream encoding
- WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (2.8mm, 6mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMs Pro, vOptimus Pro

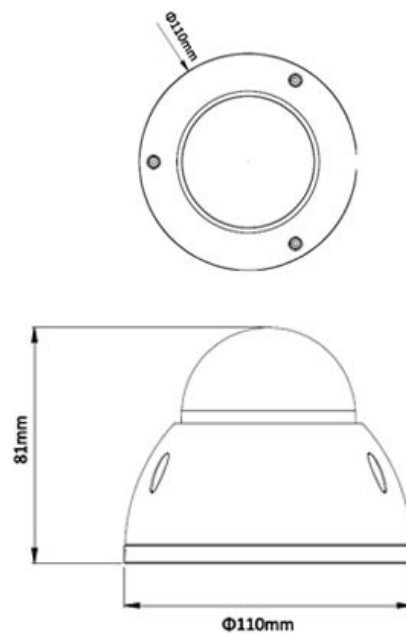

CP- UNC-VD40L3-D**4 MP Full HD WDR IR Vandal Dome Camera - 30Mtr.****Feature**

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
S/N Ratio
Video Compression
Back Light Compensation
Video Streaming
Resolution
Privacy Mask
ICR
Protocol
Smart Detection
Ethernet
User Account
IR
Smart Phone
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Regulatory
Dimension
Weight

Specification

1/3" 4Megapixel progressive scan CMOS
0.01Lux/F2.1(Color), 0Lux/F2.1(IR on)
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
Auto/Manual
3.6mm(2.8mm, 6mm optional)
More than 50dB
N/A
BLC / HLC / WDR(120dB)
Main Stream: 4M(1~20fps)/3M(1~25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps), Third Stream: 720P(1-5/8fps) (WDR on), 720P(1-18/2fps) (WDR off)
4M(2560× 1440)/3M(2304× 1296)/1080P(1920× 1080)/720P(1280×720)/D1(704× 576/704× 480) /CIF(352× 288/352× 240)
Up to 4 areas
Auto(ICR)/Color/B/W
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI
Tripwire, Intrusion, Scene Change, Face detect
RJ-45 (10/100Base-T)
20 Users
IR Range of 30 Mtr.
iPhone, iPad, Android, Windows Phone
-40°C~+60°C, Less than 95% RH
DC12V, PoE (802.3af)
Max 4W
IP67
CE, FCC, RoHS & UL
Φ110mm× 81mm
0.33Kg(with package 0.47Kg)