
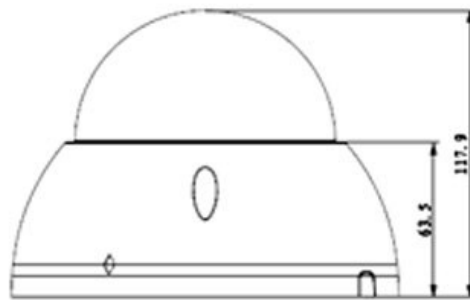


CP- UNC-VE41ZL5-MD**4MP Full HD WDR IR Vandal Dome Camera - 50Mtr.****Main Features**

- 1/3" 4MP PS CMOS Image Sensor
- Max 20fps@4MP and 25/30fps@3MP
- H.265 / H.264 / MJPEG triple-stream encoding
- WDR(120dB), Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 2.7 -12mm Motorized Lens
- IR Range of 50 Mtrs, Micro SD, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMs Pro, vOptimus Pro



CP- UNC-VE41ZL5-MD

4MP Full HD WDR IR Vandal Dome Camera - 50Mtr.



Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
Video Compression
S/N Ratio
Back Light Compensation
Video Streaming
Resolution
Privacy Mask
ICR
Audio Input
Audio Compression
Audio Output
Alarm IN
Alarm Out

Specification

1/3" 4MP Progressive scan CMOS
0.01Lux/F1.4(Color); 0Lux/F1.4(IR on)
Auto/Manual, 1/3(4)~1/10000s
Auto
Auto/Manual
2.7 -12mm Motorized Lens
H.265/H.264/H.264H/H.264B/MJPEG
More than 50dB
BLC/ HLC/ WDR(120dB)
Main Stream: 4M(1~20fps)/3M(1 ~ 25/30fps), Sub Stream: D1/CIF(1 ~ 25/30fps), Third Stream: 720P(1~5/8fps) WDR on, 720P(1~18/2fps) WDR off
4M(2560x1440) / 3M(2048x 1536)/1080P(1920x 1080) / 720P(1280x 720) /D1(704x 576) / CIF(352x 288)
Up to 4 areas
Auto(ICR)/Color/B/W
1 Channel
G.711a / G.711u/ AAC
1 Channel
2 Channel
1 Channel
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI
Tripwire, Intrusion, Scene Change, Missing/Abandoned, Audio detect, Face detect
RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android, Windows Phone
IR Range of 50 Mtr.
Micro SD, Max 128GB
-30°C~+60°C, Less than 95% RH
DC12V(AC24V optional), PoE (802.3af)
Max 10W (with IR on, motorized lens working)
IP67 & IK10



 CP- UNC-VE41ZL5-MD

4MP Full HD WDR IR Vandal Dome Camera - 50Mtr.

**Feature**

Dimension

Weight

Specification

Φ159mm × 117.9mm

0.8kg