


CP- UNC-PT13L1-VMW**1.3MP HD WiFi IR PT Camera - 10Mtr.****Main Features**

- 1/3" 1.3MP CMOS Image Sensor
- Max25/30fps@1.3MP(1280×960)
- H.264 & MJPEG dual-stream encoding
- Wi-Fi support, 0~355° Pan range, 90°Tilt range, 25 presets
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 3.6 mm Lens
- IR Range of 10 Mtrs, Micro SD Card
- Built-in Mic & Speaker
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro

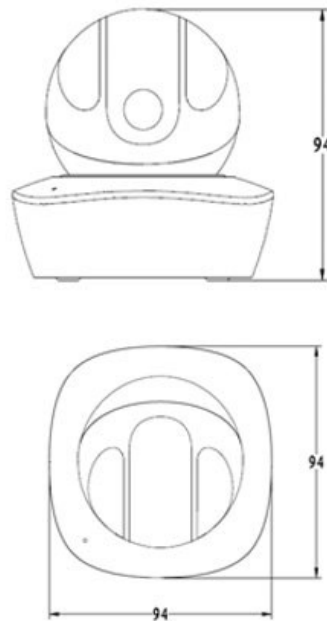

CP- UNC-PT13L1-VMW**1.3MP HD WiFi IR PT Camera - 10Mtr.****Feature**

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
S/N Ratio
Video Compression
Back Light Compensation
Video Streaming
Resolution
ICR
Audio Input
Audio Compression
Audio Output
Interface
Wireless

Specification

1/3" 1.3MP CMOS
0.01lux/F2.0(color),0lux/F2.0(IR on)
Auto/Manual, 1/3s~1/30000s
Auto/Manual
Auto/Manual
3.6mm
More than 50dB
H.264/MJPEG
BLC/ HLC/ DWDR
Main Stream: 1.3MP/720P(1~30fps), Extra Stream: VGA/QVGA(1~30fps)
1.3MP/720P/VGA/QVGA
Auto(ICR)/Color/B/W
Built in Mic
G.711a;G.711Mu;AAC
Built in Speaker
Micro USB
Wi-Fi(IEEE802.11b/g/n), 50m(open field)

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI

RJ-45 (10/100Base-T)
10 Users
iPhone, iPad, Android, Windows Phone
IR Range of 10 Mtr.
Pan/ Tilt Range: Pan: 0°~355°; Tilt: 0°~90°, preset speed: 100°/s, 25 Presets, 8 tour
Max 128GB
-10°C~+45°C, Less than 95%RH
DC 5V2A
<7.5W
94mm x 94mm x 94mm
0.36Kg

Protocol

Ethernet

User Account

Smart Phone

IR

Special Features

Micro SD

Operating Temperature

Power Source

Power Consumption

Dimension

Weight