

DH-IPC-HFW4120E

1.3Megapixel HD Network Small IR-Bullet Camera



Features

- 1/3" 1.3Megapixel progressive scan CMOS
- H.264 & MJPEG triple-stream encoding
- Smart Detection supported
- Max 25/30fps@1.3M(1280×960)
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- 3.6mm fixed lens (6mm, 8mm optional)
- Max. IR LEDs Length 50m
- IP67, PoE

DH-IPC-HFW4120E

Technical Specifications


Model		DH-IPC-HFW4120E	
Camera			
Image Sensor		1/3" 1.3Megapixel progressive scan CMOS	
Effective Pixels		1280(H)x960(V)	
Scanning System		Progressive	
Electronic Shutter Speed		Auto/Manual, 1/3(4)~1/100000s	
Min. Illumination		0.01Lux/F2.0(Color), 0Lux/F2.0(IR on)	
S/N Ratio		More than 50dB	
Video Output		N/A	
Camera Features			
Max. IR LEDs Length		50m	
Day/Night		Auto(ICR)/Color/B/W	
Backlight Compensation		BLC / HLC / DWDR	
White Balance		Auto/Manual	
Gain Control		Auto/Manual	
Noise Reduction		3D	
Privacy Masking		Up to 4 areas	
Lens			
Focal Length		3.6mm (6mm, 8mm optional)	
Max Aperture		F2.2(F2.0/F1.8)	
Focus Control		Manual	
Angle of View		H:72°(46°/38.5°)	
Lens Type		Fixed lens	
Mount Type		Board-in Type	
Video			
Compression		H.264/H.264H/H.264B/MJPEG	
Resolution		1.3M(1280×960) / 720P(1280×720) / D1(704×576/704×480) / CIF(352×288/352×240)	
Frame Rate	Main Stream	1.3M/720P(1~25/30fps)	
	Sub Stream	D1/CIF(1~25/30fps)	
	Third Stream	720P(1~14/7fps)	
Bit Rate		H.264: 32Kbps~10Mbps	
Corridor Mode		Support	
Audio			
Compression		N/A	
Interface		N/A	
Smart Function			
Smart detection		Tripwire	
		Intrusion	
		Scene change	
		Face detect	
Network			

DH-IPC-HFW4120E


Ethernet	RJ-45 (10/100Base-T)
Wi-Fi	N/A
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
Compatibility	ONVIF, PSIA, CGI
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	
Memory Slot	N/A
RS485	N/A
Alarm	N/A
PIR Sensor Range	N/A
General	
Power Supply	DC12V, PoE (802.3af)
Power Consumption	Max 5.5W
Working Environment	-40°C~+60°C, Less than 95% RH
Ingress Protection	IP67
Vandal Resistance	N/A
Dimensions	70mm×70mm×180mm
Weight	0.406kg(0.528kg with packaging)

DH-IPC-HFW4120E

Dimensions (mm)

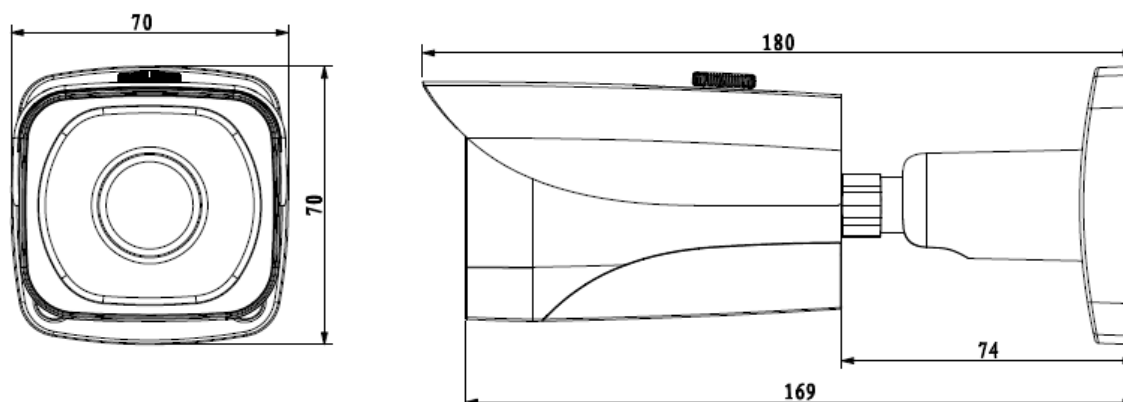

Accessories (optional)

		
PFA121	PFA152	PFA151

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.