

DH-SD59430U-HN

4Mp Full HD 30x Network IR PTZ Dome Camera



Features

- 30x optical zoom
- H.265&H.264 Encoding, Ultra-low bit rate transmission
- Max. 25/30fps@4M(2592×1520) & 50/60fps@1080P resolution
- WDR, Day/Night(ICR), Ultra DNR, Auto iris, Auto focus
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- Max 400°/s pan speed, 360° endless pan rotation
- Up to 300 presets, 5 auto scan, 8 tour, 5 pattern
- Built-in 2/1 alarm in/out
- Support intelligent 3D positioning with DH-SD protocol
- Micro SD memory, IP66, POE+
- IR Distance up to 100m(AC24V)/ 80m(PoE+)

DH-SD59430U-HN

Technical Specifications


Model	DH-SD59430U-HN
Camera	
Image Sensor	1/3"Color CMOS
Effective Pixels	2688(H) x 1520(V) 4Mp
Scanning System	Progressive
Electronic Shutter Speed	1/3 ~ 1/30,000s
Min. Illumination	Color: 0.05Lux@F1.6; B/W: 0.005Lux@F1.6
S/N Ratio	More than 55dB
Video Output	BNC(1.0Vp-p/75Ω), PAL / NTSC
Camera Features	
Day/Night	Auto(ICR) / Color / B/W
Backlight Compensation	BLC / HLC / WDR
White Balance	Auto, ATW, Indoor, Outdoor, Manual
Gain Control	Auto / Manual
Noise Reduction	Ultra DNR (2D/3D)
Privacy Masking	Up to 24 areas
Digital Zoom	16x
Lens	
Focal Length	4.5mm ~ 135.0mm (30x Optical zoom)
Max Aperture	F1.6~F4.4
Focus Control	Auto / Manual
Angle of View	H: 60° ~ 2.40°
Close Focus Distance	100mm~ 1500mm
PTZ	
Pan/Tilt Range	Pan: 0° ~ 360° endless; Tilt: -15° ~ 90°, auto flip 180°
Manual Control Speed	Pan: 0.1° ~ 300° /s; Tilt: 0.1° ~ 200° /s
Preset Speed	Pan: 400° /s; Tilt: 300° /s
Preset	300
PTZ Mode	5 Pattern, 8 Tour, Auto Pan, Auto Scan
Speed Setup	Human-oriented focal length/ speed adaptation
Power up Action	Auto restore to previous PTZ and lens status after power failure
Idle Motion	Activate Preset/ Pan/ Scan/ Tour/ Pattern if there is no command in the specified period
IR Distance	80m (PoE+) 100m (AC24V)
Video	
Compression	H.265 /H.264 / MJPEG
Resolution	4M(2592×1520)/3M(2304×1296)/1080P(1920×1080)/ 1.3M(1280×960)/720P(1280×720) / D1(704×576/ 704×480) /CIF

DH-SD59430U-HN

Frame Rate	Main Stream	4M/3M(1~25/30fps)/1080P(1~50/60fps)/1.3M/720P(1~25/30fps)
	Sub Stream 1	D1/CIF(1 ~ 25/30fps)
	Sub Stream 2	1080P /960P/720P(1 ~ 25/30fps)
Bit Rate		H.265/H.264: 192K ~ 8192Kbps, MJPEG: 192K ~ 2048Kbps
Audio		
Compression		G.711a / G.711Mu(32kbps)/ PCM(128kbps)
Interface		1/1 channel In/Out
Intelligent Function		
IVS (optional)		Tripwire, Intrusion, Abandoned Object Detection, Missing Object Detection
Face Detection		Support
Network		
Ethernet		RJ-45 (10/100Base-T)
Protocol		IPv4/ IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x
Compatibility		ONVIF PSIA CGI
Max. User Access		20 users
Smart Phone		iPhone, iPad, Android, Windows Phone
Auxiliary Interface		
Memory Slot		Micro SD, Max 64GB
Alarm		2/1 channel In/Out
General		
Power Supply		AC24V, POE plus(802.3at)
Power Consumption		PoE: 13W, 20W (IR on) AC24V: 13W, 23W (IR on)
Working Environment		PoE: -30°C ~ 60°C / Less than 90% RH AC24V: -40°C ~ 70°C / Less than 90% RH
Ingress Protection		IP66
Dimensions		Φ186.0(mm) x 309(mm)
Weight		3.5kg

DH-SD59430U-HN

Dimensions (mm)

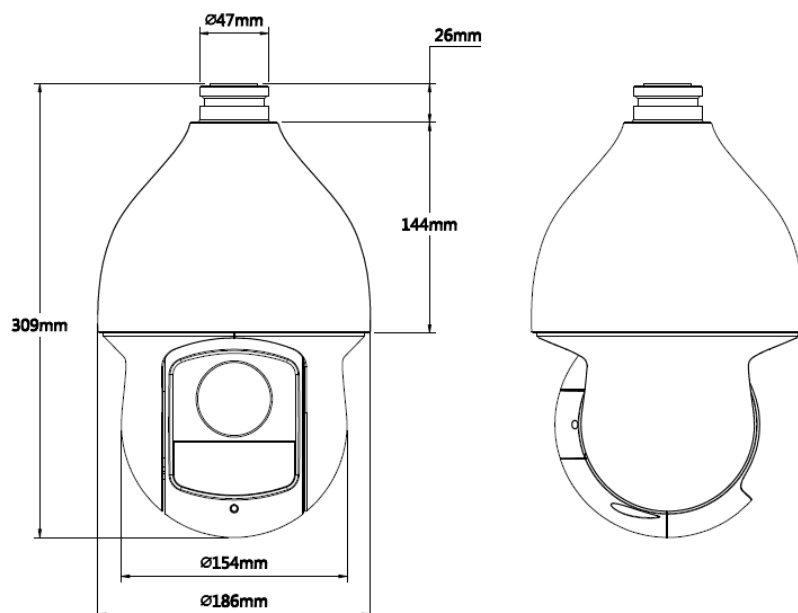

Accessories

		
DH-PFB300S	DH-PFA110	Power Supply

DH-SD59430U-HN

Accessories (Optional)

						
DH-PFB300C	DH-PFA112	DH-PFA113	DH-PFB301S	DH-PFA120	DH-PFA150	DH-PFA151

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology