

DH-NVR4216/4232-16P

16/32CH 1U 16PoE Network Video Recorder



Features

- > Up to 16/32 channel IP camera input
- > H.264/MJPEG dual codec decoding
- > Max 200Mbps incoming bandwidth
- > Up to 5Mp resolution preview&playback
- > HDMI/VGA simultaneous video output
- > 16 channel synchronous realtime playback, GRID interface
- > Support Multi-brand network cameras: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek and etc.
- > ONVIF Version 2.4 conformance
- > 3D intelligent positioning with Dahua PTZ camera
- > Support 2 SATA HDDs up to 8TB, 2 USB(1 USB3.0)
- > Support IPC UPnP, 16PoE ports
- > Multiple network monitoring: Web viewer, CMS(DSS/Smart PSS) & DMSS

DH-NVR4216/4232-16P


Technical Specifications

Model	DH-NVR4216-16P		DH-NVR4232-16P	
System				
Main Processor	Dual-core embedded processor			
Operating System	Embedded LINUX			
Video& Audio				
IP Camera Input	16 channel		32 channel	
Two-way Talk	1 channel Input, 1 channel Output, RCA			
Display				
Interface	1 HDMI, 1 VGA			
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768			
Display Split	1/4/8/9/16		1/4/8/9/16	
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording			
Recording				
Compression	H.264/MJPEG			
Resolution	5Mp(2560×1920)/4Mp(2560×1440)/3Mp(2048×1536)/1080P(1920×1080)/720P(1280×720)/D1 (704×576/704×480)			
Record Rate	200Mbps			
Bit Rate	48~ 8192kbps			
Record Mode	Manual, Schedule(Regular(Continuous), MD, Alarm), Stop			
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec			
Video Detection & Alarm				
Trigger Events	Recording, PTZ, Tour, Alarm, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips			
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank			
Alarm Input	4 channel			
Relay Output	2 channel			
Playback & Backup				
Sync Playback	1/4/9/16		1/4/9/16	
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second), Smart search			
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom			
Backup Mode	USB Device/Network/Internal SATA burner			
Network				
Ethernet	1 RJ-45 port (10/100/1000Mbps)			
PoE	16 ports (IEEE802.3at/af)			
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, Alarm Server, IP Search(Support Dahua IP camera, DVR, NVS and etc.)			
Max. User Access	128 users			
Smart Phone	iPhone, iPad, Android			
Storage				

DH-NVR4216/4232-16P

Internal HDD	2 SATA ports, up to 8TB
Auxiliary Interface	
USB	2 ports (1 Rear USB3.0, 1 Front USB2.0)
RS232	1 port, For PC communication & Keyboard
General	
Power Supply	Single, AC 100~240V, 47/63 Hz
Power Consumption	NVR: <30W (without HDD) PoE: Max 25.5W for single port, 130W in total
Working Environment	-10°C ~ +55°C / 10%~90%RH / 86~106kpa
Dimension (W×D×H)	1U, 375mm×327mm×53mm
Weight	2.5KG (without HDD)

System Connection

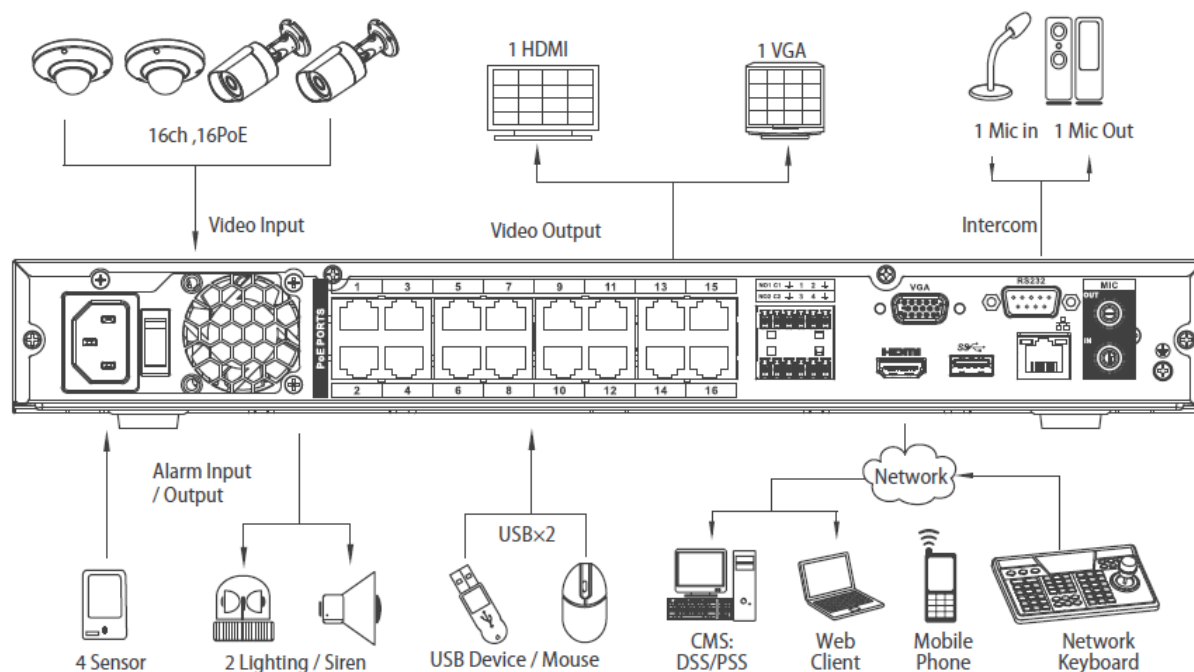

*Take NVR4216-16P as an example

Dahua Technology Co., Ltd.

1199' BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2015 Dahua Technology Co., Ltd.