


CP- VNP-3320R50-M

2MP 33x Full HD IP IR PTZ Camera

INDIGO

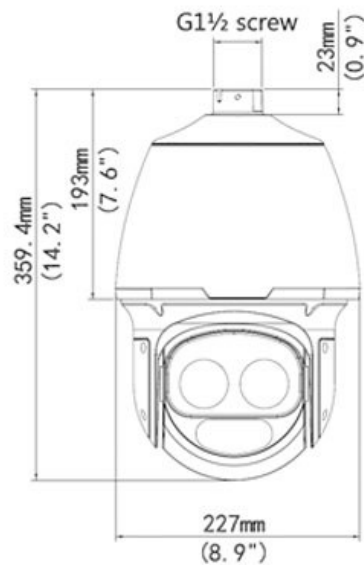

Main Features

- 1/2.8" 2 MP PS Image Sensor
- Powerful 33x Optical Zoom
- HD optical glass window with higher light transmittance
- Up to 255 Presets, 16 patrol, 16 Pattern
- Max 240°/s pan speed, 360° endless pan rotation
- Built-in 2/1 alarm in/out, IP66
- IR Range of 500 Mtr., Micro SD
- Mobile Software for Android, iOS
- CMS Software: IVMS



CP- VNP-3320R50-M

2MP 33x Full HD IP IR PTZ Camera



Feature

Image Sensor
Effective Pixels
Video Output
S/N Ratio
Minimum Illumination
Focal Length
White Balance
Focus Control
Iris Control
Electronic Shutter
AGC control
Optical Zoom
Digital Zoom
Pan Travel
Tilt Travel
Presets
Preset Speed
Special Features
Privacy Masking
Day/Night: IR Cut Filter
Video Compression
Video Streaming
Audio Compression
Audio Streaming
Networking
Protocols
Alarm
Operating Temperature
Memory Slot
Weather Proof Standard
Dimension
Weight

Specification

1/2.8" 2MP CMOS
1920(H) x 1080(V)
1 BNC, impedance 75Ω; amplitude 1 V [p-p]
More than 52dB
Color: 0.02 lux (F1.6, 50IRE), B/W: 0 lux
4.5mm ~ 148.5 mm
Auto / Manual
Auto / Manual
Auto/Manual, F1.6 ~ F5.3
Auto/Manual; shutter time: 1/6 s ~ 1/8000 s
Auto / Manual
33x
Supports
360° endless, Pan Speed: 0.1°/s ~ 240°/s
-15° ~ 90°, Tilt Speed: 0.1° ~ 160°/sec
255
Pan: 300° /s; Tilt: 240° /s
IR Range upto 500m, Up to 255 Presets, 16 Patrol, 16 Pattern
Up to 8 areas
IR-cut filter with auto switch (ICR)
H.264 / MJPEG
1080P(1 ~ 25/30fps) Triple Stream
G.711a
Two way Talk Supported
10M/100M Base-TX Ethernet, 1 RS485
L2TP, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, NTP, FTP, HTTP, SNMP, SIP, ONVIF,
2 In/1 Out
-40°C ~ +70°C (-40°F ~ 158°F), Humidity ≤ 90% RH(non-condensing)
Up to 128GB
IP66
Ø227 x 359.4 mm (Ø8.9" x 14.2")
5.5kg



CP- VNP-3320R50-M

2MP 33x Full HD IP IR PTZ Camera



Feature

Power Source

Power Consumption

Specification

24 V AC $\pm$ 25% (default power supply), 24 V DC

14 W ~ 48 W



**Product casing and specifications are subject to change without prior notice*